


Showroom Wall Letters

Large BUICK Logo Installation Guide

Supplies Required:

Molded Logo / Letters (included)
Paper Template (included)
Printed color inlays (included)
Masking tape (removeable)
Tape measure & Level
Wall fasteners (drywall screws suggested)



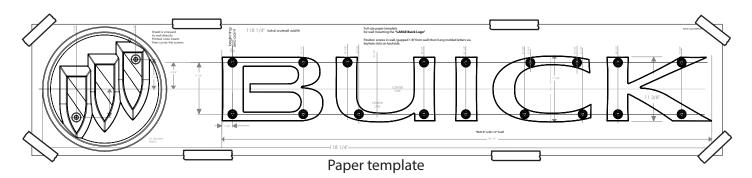

Additional Information:

Overall installed size is **9 ft. 10-1/4 in. x 22 in.** (**shield is 22" dia.**) Clean any fingerprints with a clean damp cloth after installation

Installation

- 1. Make sure mounting surface is clean and confirm that the wall material is suitable for screw attachment.
- 2. Measure wall area and compare dimensions with paper template to determine location on wall.
- 3. Tape template to wall, check centerline and level.
- 4. Mark twenty hole mounting locations through template with a small nail or pin.
- 5. Remove paper template from wall.
- 6. Position plastic round logo on wall aligned over pin markings or pilot holes.
- 7. Drive screws through existing mounting holes into wall (two for the shield logo).
- 8. Peel backing off of each printed color inlay and carefully apply to recessed surface of shield. Red-left, white-center, blue-right. These cover and conceal the screws.
- 9. Install 18 screws in wall for the BUICK letters in the positions that were marked earlier. Leave screws protruding about 1/8 inch for letters to hook onto (via keyhole slots on the backside)

If letters are too tight or too loose, adjust the screw depth accordingly for a snug fit.

Call DCI-Artform at 1-800-766-5660 with any questions.



GR 9.21.17 BUICK Large INSTALL.ai