




Showroom Wall Letters

Medium BUICK Logo Installation Guide

Supplies Required:

- Molded Logo / Letters (included)
- Paper Template (included)
- Printed color inlays (included)
- Masking tape (removeable)
- Tape measure & Level
- Wall fasteners (drywall screws suggested)

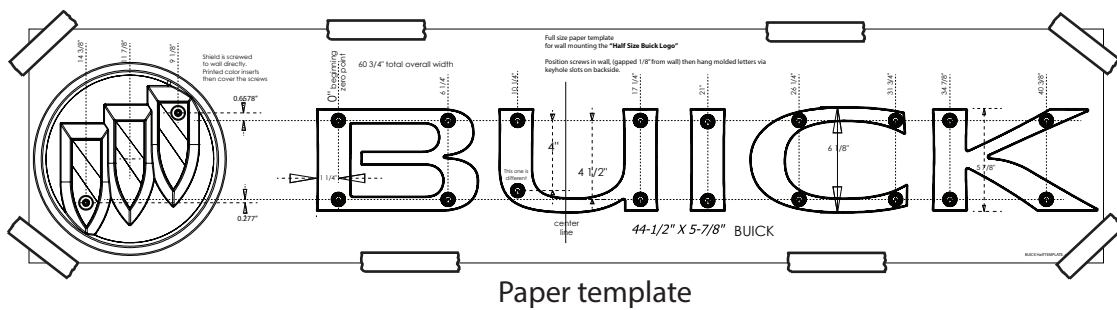

Additional Information:

Overall installed size is **5 ft. 3/4 in. x 11 in.** (letters are 8-3/4" high, shield is 11" dia.)
Clean any fingerprints with a clean damp cloth after installation

Installation

1. Make sure mounting surface is clean and confirm that the wall material is suitable for screw attachment.
2. Measure wall area and compare dimensions with paper template to determine location on wall.
3. Tape template to wall, check centerline and level.
4. Mark twenty hole mounting locations through template with a small nail or pin.
5. Remove paper template from wall.
6. Position plastic round logo on wall aligned over pin markings or pilot holes.
7. Drive screws through existing mounting holes into wall (two for the shield logo).
8. Peel backing off of each printed color inlay and carefully apply to recessed surface of shield.
Red-left, white-center, blue-right. These cover and conceal the screws.
9. Install 18 screws in wall for the BUICK letters in the positions that were marked earlier. Leave screws protruding about 1/8 inch for letters to hook onto (via keyhole slots on the backside)

If letters are too tight or too loose, adjust the screw depth accordingly for a snug fit.

Call DCI-Artform at 1-800-766-5660 with any questions.